

## IsoPlane® 81

Spectrometer & Accessories

### The Best Imaging Spectrograph on the Market

» **Broad spectral range, high spectral resolution, and best quality data**

- 200 – 1100 nm
- Up to 0.05 nm resolution
- eXcelon™ technology for etaloning suppression

» **Superior signal-to-noise ratio and dynamic range**

- Back-illuminated CCDs with >95% peak QE
- Deep depletion for enhanced QE in NIR range
- Deep cooling and low dark noise

» **Fast spectral rates**

- Dual-port readout up to 4.55 MHz
- Frame-transfer technology
- Spectral kinetics mode

» **Revolutionary optical design**

- Zero aberrations at all wavelengths over entire focal plane
- Perfect for multichannel and hyperspectral imaging



### Changing the Landscape of Spectroscopic Research

When the first aberration-free IsoPlane 320 was introduced in 2013, it immediately became the gold standard for imaging spectrographs. Today, IsoPlane instruments remain the only aberration-free spectrographs on the market.

Paired with Teledyne Princeton Instruments' extensive selection of scientific cameras, our patented and revolutionary IsoPlane design enables leading-edge research and application development in numerous laboratories around the world.

The new IsoPlane 81 system seamlessly integrates an aberration-free spectrograph and a deep-cooled scientific CCD camera in a footprint smaller than a typical laptop computer — all while providing performance far superior to that of conventional spectrometers twice the size.

Furthermore, we offer a complete ecosystem of IsoPlane 81 accessories that not only facilitate today's critical measurements but support tomorrow's most ambitious experiments.



[www.princetoninstruments.com](http://www.princetoninstruments.com)  
[info@princetoninstruments.com](mailto:info@princetoninstruments.com)  
tel: +1 609.587.9797




**TELEDYNE**  
**PRINCETON INSTRUMENTS**  
Everywhere you look™


## PRIMARY APPLICATIONS

- Raman spectroscopy and imaging
- Fluorescence, emission, absorption
- Microspectroscopy
- Hyperspectral imaging

## HIGHLIGHTED RESEARCH AREAS



Materials Science:  
2D, nano, LED



Bio and Life Science: cancer  
diagnostics, cytometry,  
pathogens, microbiology



Pharmaceutical: process  
analytical technology, drug  
manufacturing, drug design



Environmental Science:  
droplet characteristics,  
pollutant analysis,  
microplastics

## SPECIFICATIONS

Spectrograph	
Focal length	80.8 mm
Aperture ratio	f/4
Spectral resolution (FWHM) <sup>†</sup>	0.13 nm
Spectrograph optics and spectral range	Protected silver coating, 400 – 1100 nm   Aluminum coating, 200 – 1100 nm
Spatial resolution	38.5 lp/mm @ 50% contrast over entire focal plane (Nyquist limited)
Grating	150 g/mm up to 4320 g/mm; user-changeable, rotatable, single-grating turret
Astigmatism / coma aberration	Zero at all wavelengths and grating angles over entire focal plane
Slits	Slit width: 10 µm up to 500 µm; 3.3 mm tall; interchangeable, laser-cut slits
Wavelength accuracy	0.13 nm
Wavelength repeatability	0.015 nm

Operation	
Software	LightField® scientific imaging and spectroscopy software
Operating system	Microsoft® Windows® 8 or 10
Data interface	USB 3.0 (3 m interface cable provided)
I/O signals	Three MCX coaxial connectors: two trigger out, one trigger in; built-in programmable pulse generator
Operating environment	+5°C to +30°C non-condensing
Certification	CE
Dimensions L x W x H	26.8 cm x 18.0 cm x 21.0 cm (11" x 7" x 8")
Weight	8.84 kg (19.5 lbs)

Specifications are typical except where noted otherwise. All specifications are subject to change.

<sup>†</sup> with a 2400 g/mm grating measured at 500 nm; contact our sales and technical support team for other configurations



www.princetoninstruments.com  
info@princetoninstruments.com  
tel: +1 609.587.9797



**TELEDYNE**  
**PRINCETON INSTRUMENTS**  
Everywhereyoulook™


CCD Camera		
Model	BRX	BX
Sensor type	TPI proprietary, back-illuminated, deep-depletion, frame-transfer CCD with eXcelon™ technology and UV coating	TPI proprietary, back-illuminated, frame-transfer CCD with eXcelon™ technology and UV coating
Sensor benefit	Enhanced NIR response with >97% peak QE	Ultralow dark current for long-exposure experiments
Sensor format	1024 x 256 (1024 x 512 including frame-transfer storage area)	
Deepest cooling temperature	-55°C guaranteed; -60°C typical	
System read noise	4 e- rms @ 200 kHz; 7 e- rms @ 1 MHz; 20 e- rms @ 4.55 MHz	
Dark current*	3 e-/pixel/sec	0.03 e-/pixel/sec
Stray light **	<10 <sup>-4</sup>	
Vertical shift rate	5.6 μsec/row to 35 μsec/row (programmable)	15.2 μsec/row to 95 μsec/row (programmable)
Spectral rate (continuous)	292 spectra/sec (full vertical bin)	124 spectra/sec (full vertical bin)
Spectral rate (burst mode)	>10,000 spectra/sec (spectral kinetics mode with 10 rows binned)	>5,000 spectra/sec (spectral kinetics mode with 10 rows binned)
Nonlinearity	<1% @ all ADC rates	
Software-selectable gains	1.5 e-/ADU (high gain); 3 e-/ADU (low gain); available at all ADC rates	

Specifications are typical except where noted otherwise. All specifications are subject to change.

\* measured at -55°C

\*\* measured with 532 nm single-mode laser 10 nm away from the laser center wavelength

## QUANTUM EFFICIENCY

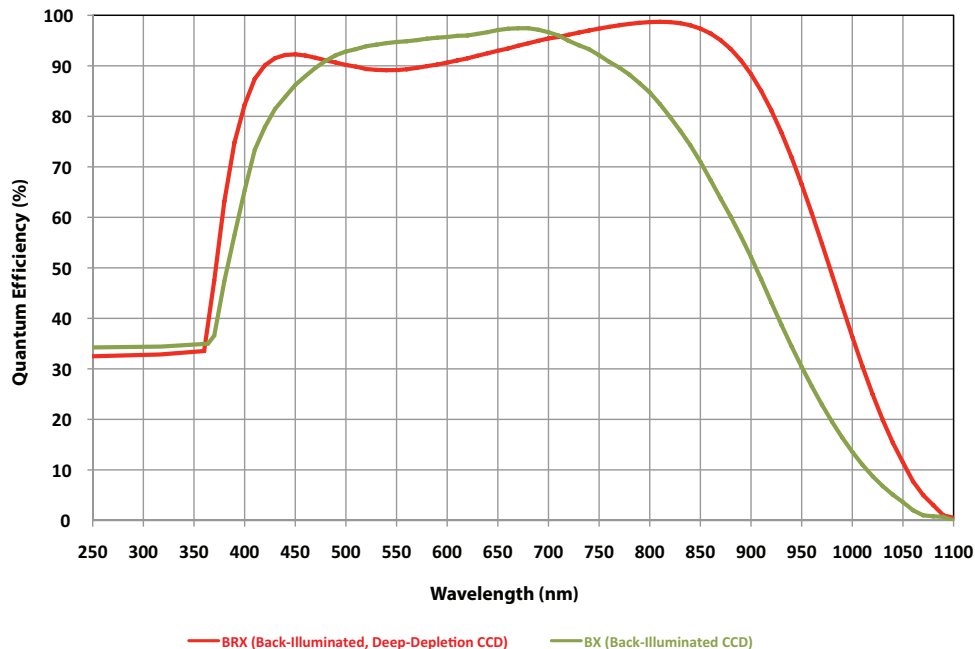

**Note:** Quantum efficiency curves for eXcelon CCDs with UV coatings. (All IsoPlane 81 models feature eXcelon CCDs with UV coatings included.)




www.princetoninstruments.com  
 info@princetoninstruments.com  
 tel: +1 609.587.9797



**TELEDYNE**  
**PRINCETON INSTRUMENTS**  
 Everywhereyoulook™

# ISOPLANE® 81 OUTLINE DRAWINGS

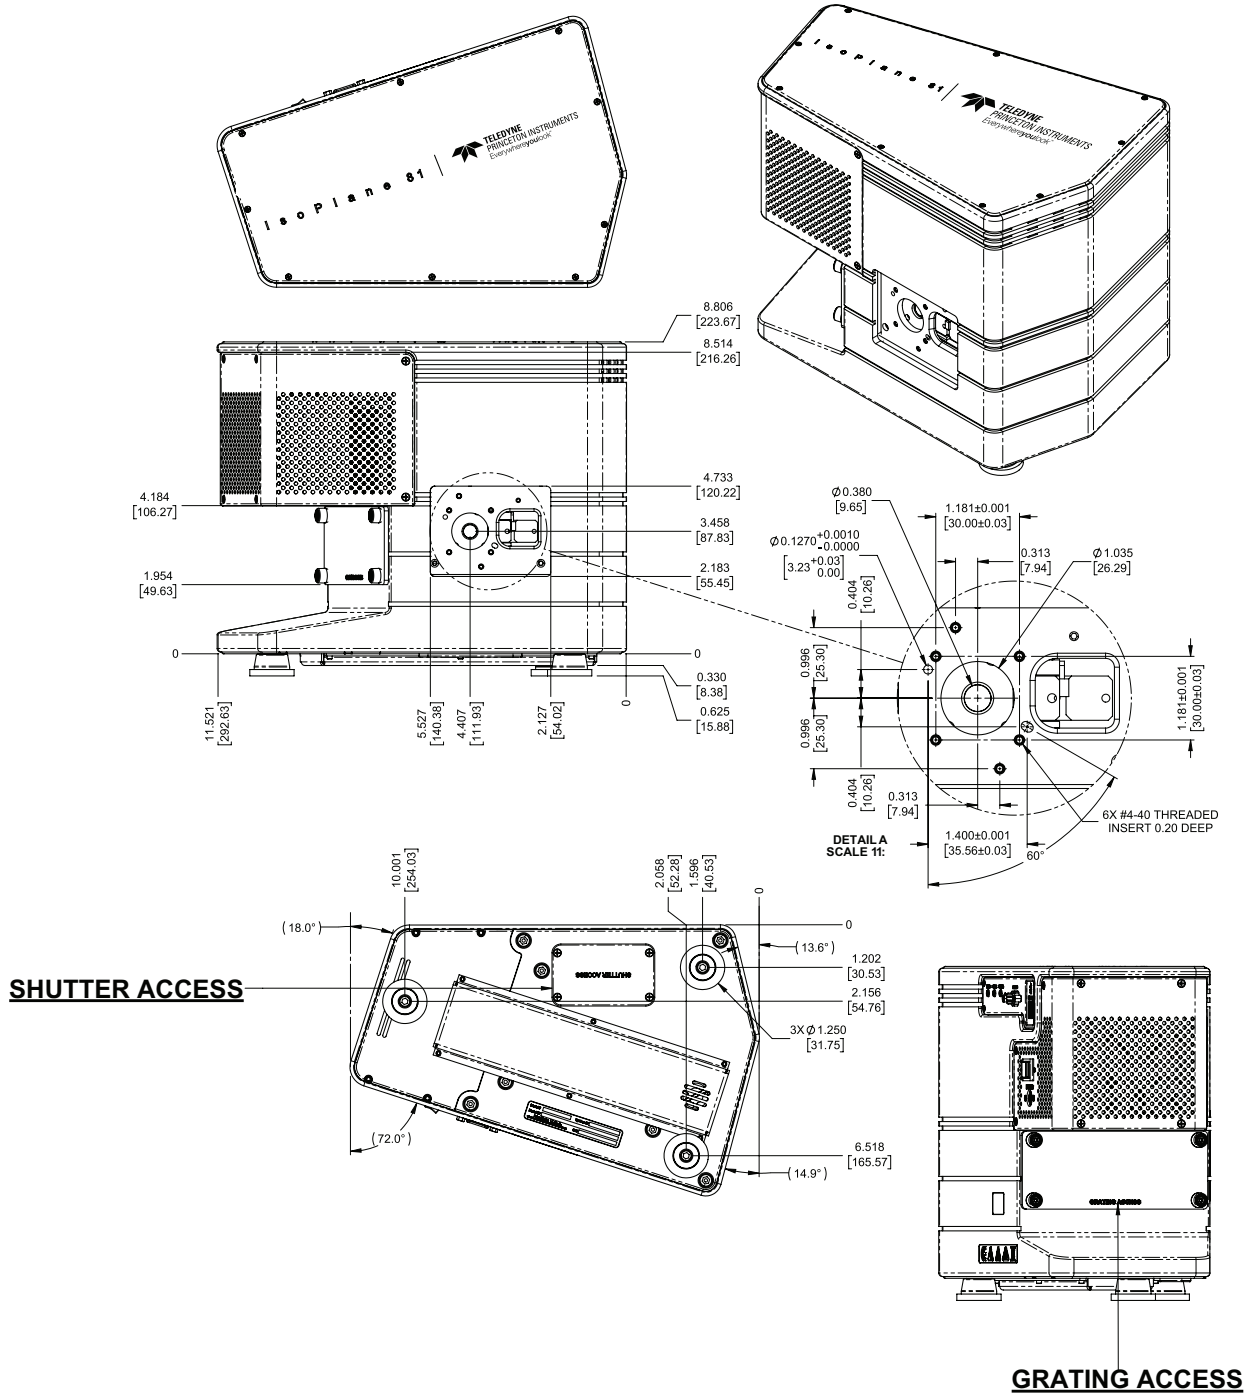

Copyright © 2020 Teledyne Princeton Instruments. All rights reserved. IsoPlane and LightField are registered trademarks of Teledyne Princeton Instruments. eXcelon is a trademark of Teledyne Princeton Instruments. Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and other countries. All other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.

 [www.princetoninstruments.com](http://www.princetoninstruments.com)  
[info@princetoninstruments.com](mailto:info@princetoninstruments.com)  
 tel: +1 609.587.9797

 **TELEDYNE**  
**PRINCETON INSTRUMENTS**  
 Everywhereyoulook™

RevA0